

1)Thermostat network steps

When the transmitter panel is powered on,press the " " for 3 seconds,the screen will display full display, and the control panel has entered the network initialization state. At this time,please make sure that the router or the corresponding WIFI device is turned on. When the corresponding WIFI symbol" "is normal, it means the connection is successful. (Note: When the transmitter board is powered by battery only, WIFI cannot be equipped with network).

2)Mobile phone networking steps

Before configuring WIFI , please make sure your phone is connected to 2.4GHz WIFI and Bluetooth.

1. Use your mobile phone to scan the QR code below to download the "Tuya Smart" app.


China



Foreign




2.Open the "Smart Life" app,display the devices to be added,click" Add",as shown below.

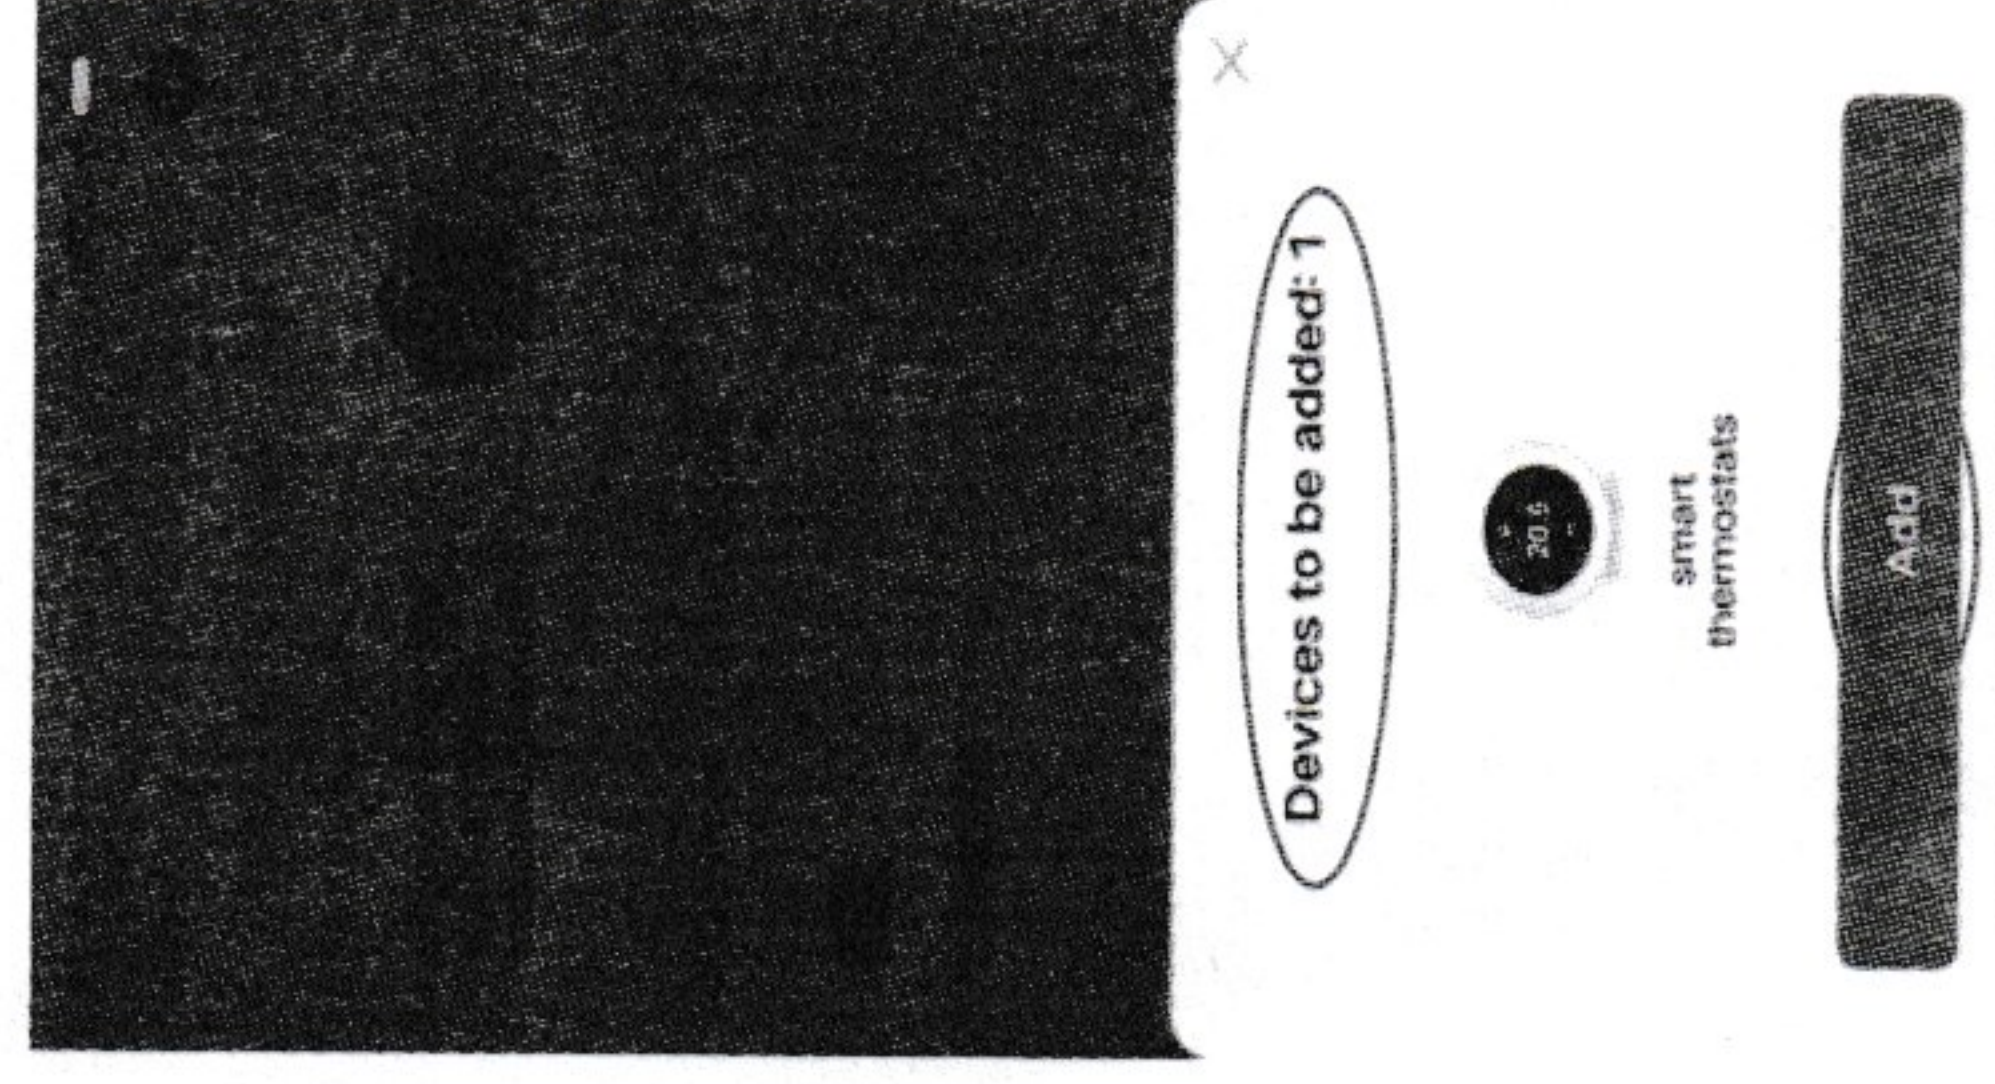

4. The phone enters the device search and connection mode, the icon " " is in the search, as shown in the image below.

3.After entering the wifi password,click "Next" as shown below.

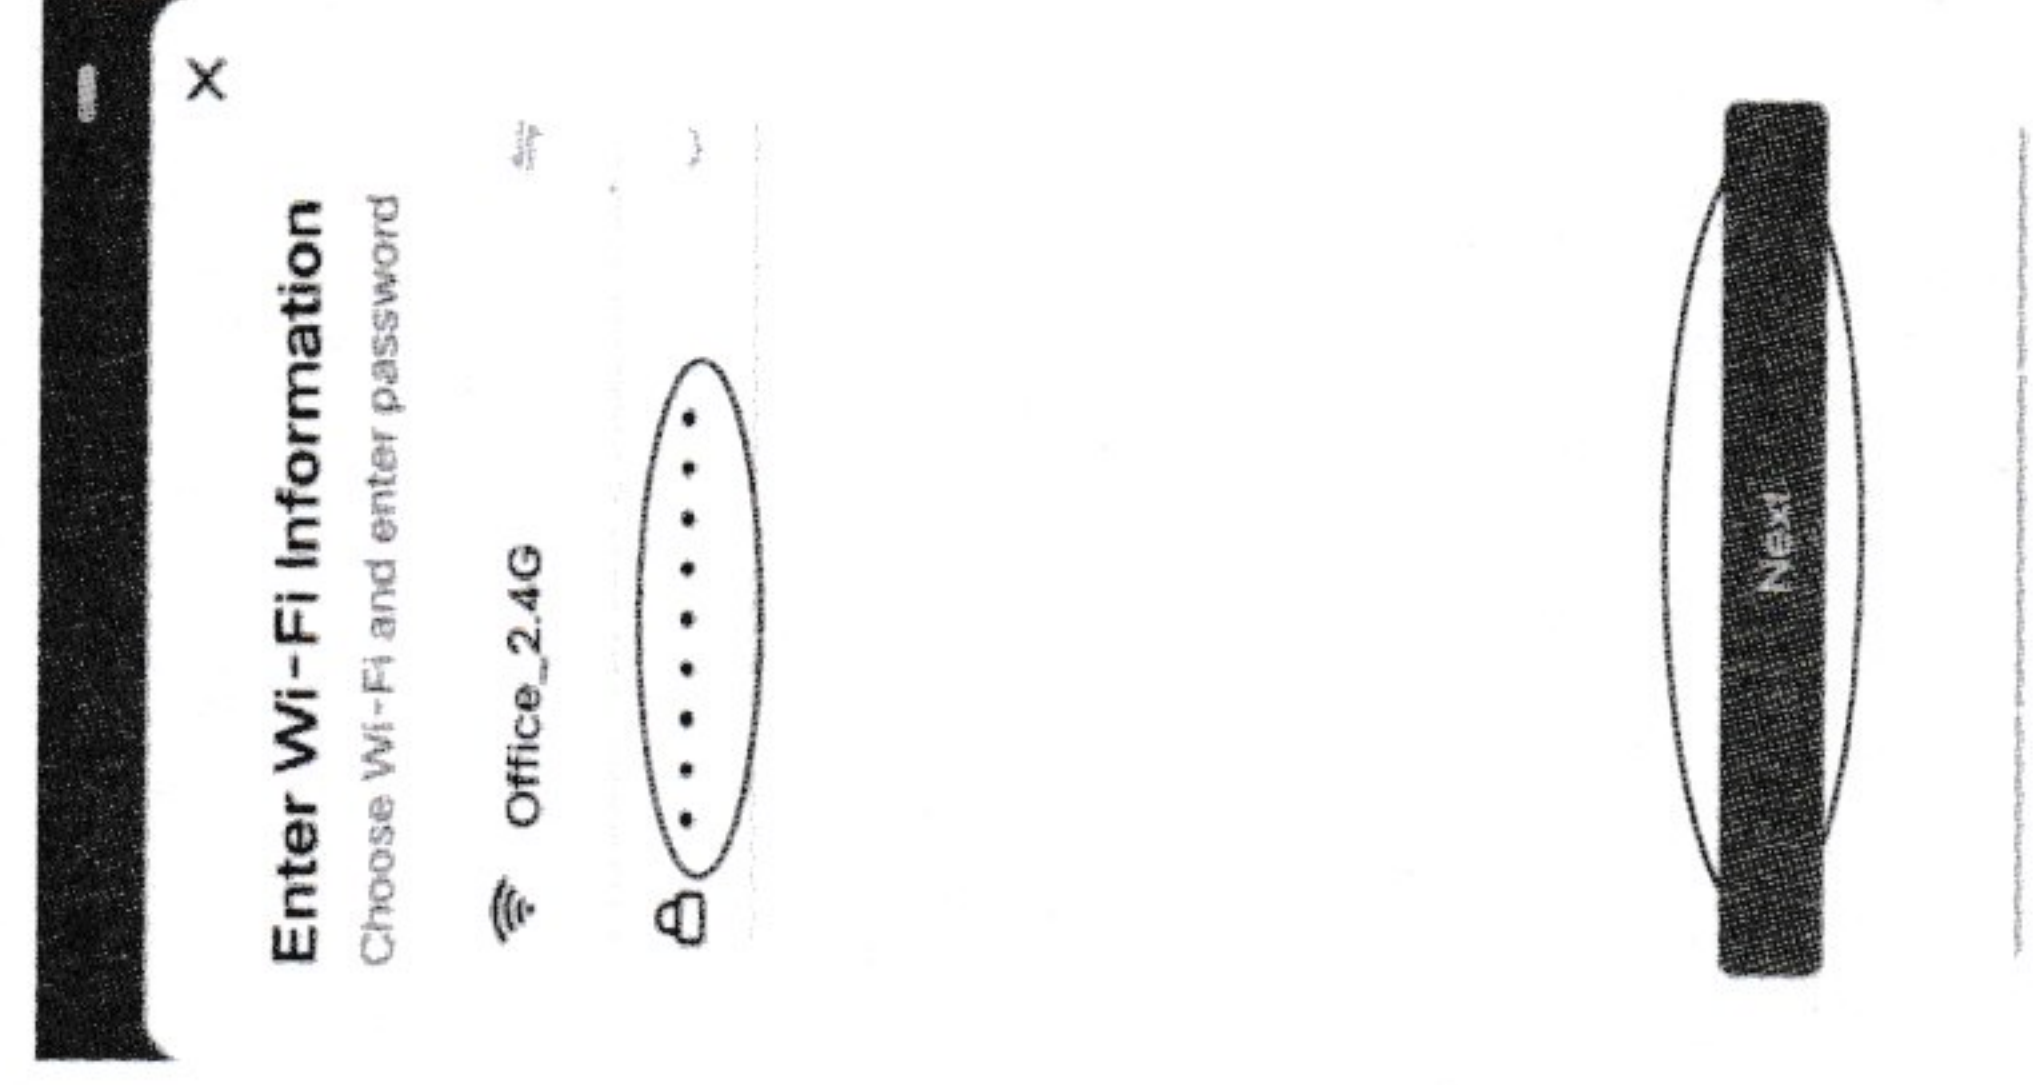


5.The mobile device connection is successful will displays the " " icon,click "Done" to enter the control interface,as shown below.




3)Device sharing instructions:



1. On the App control interface click " ", as shown below.

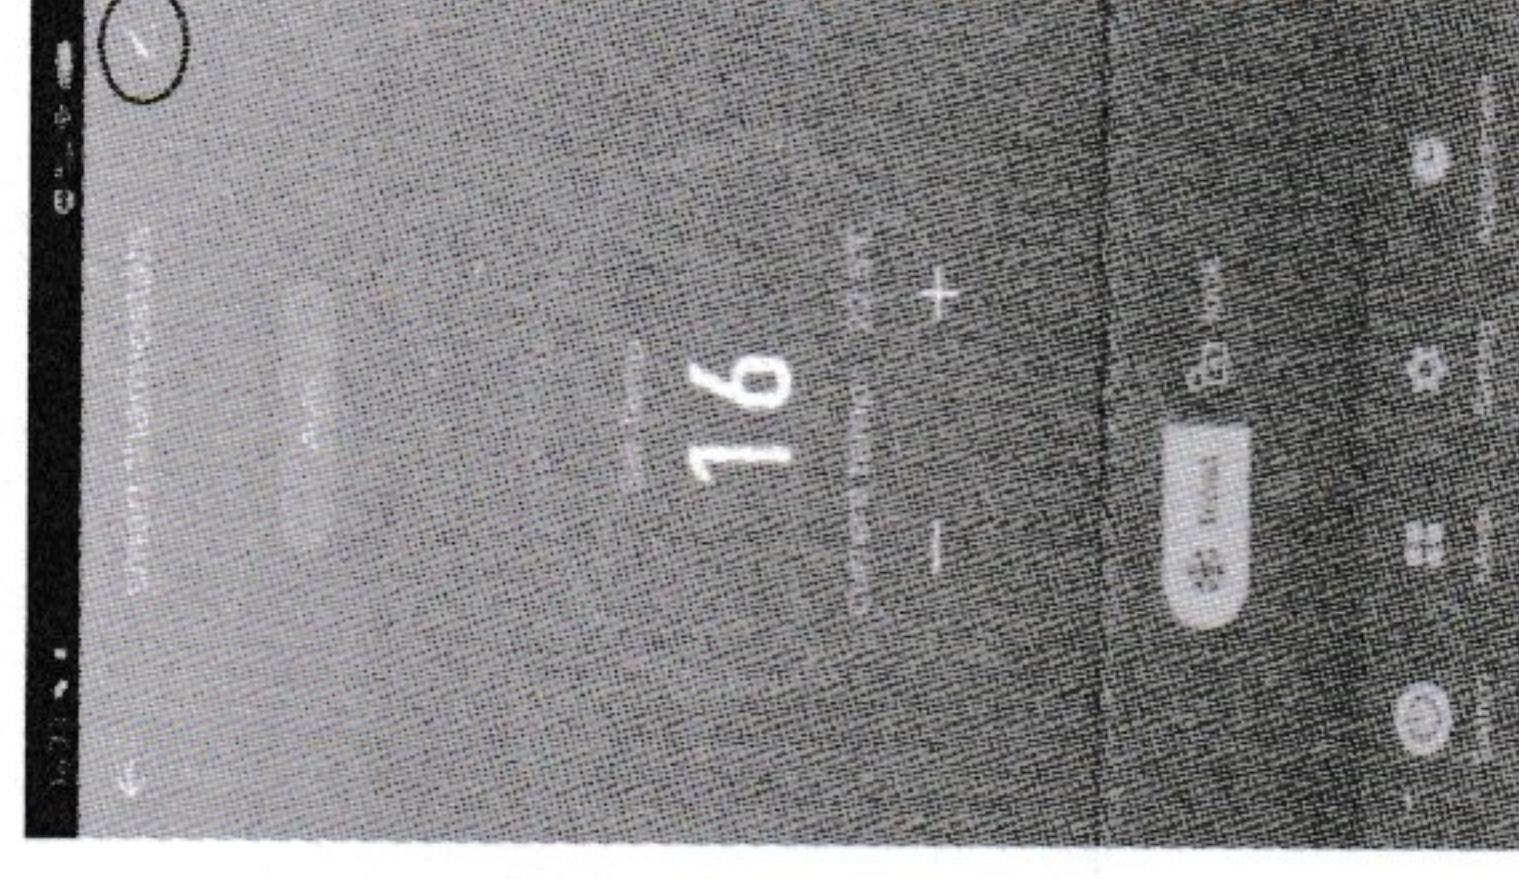


2. Click "Share Device", as shown below.

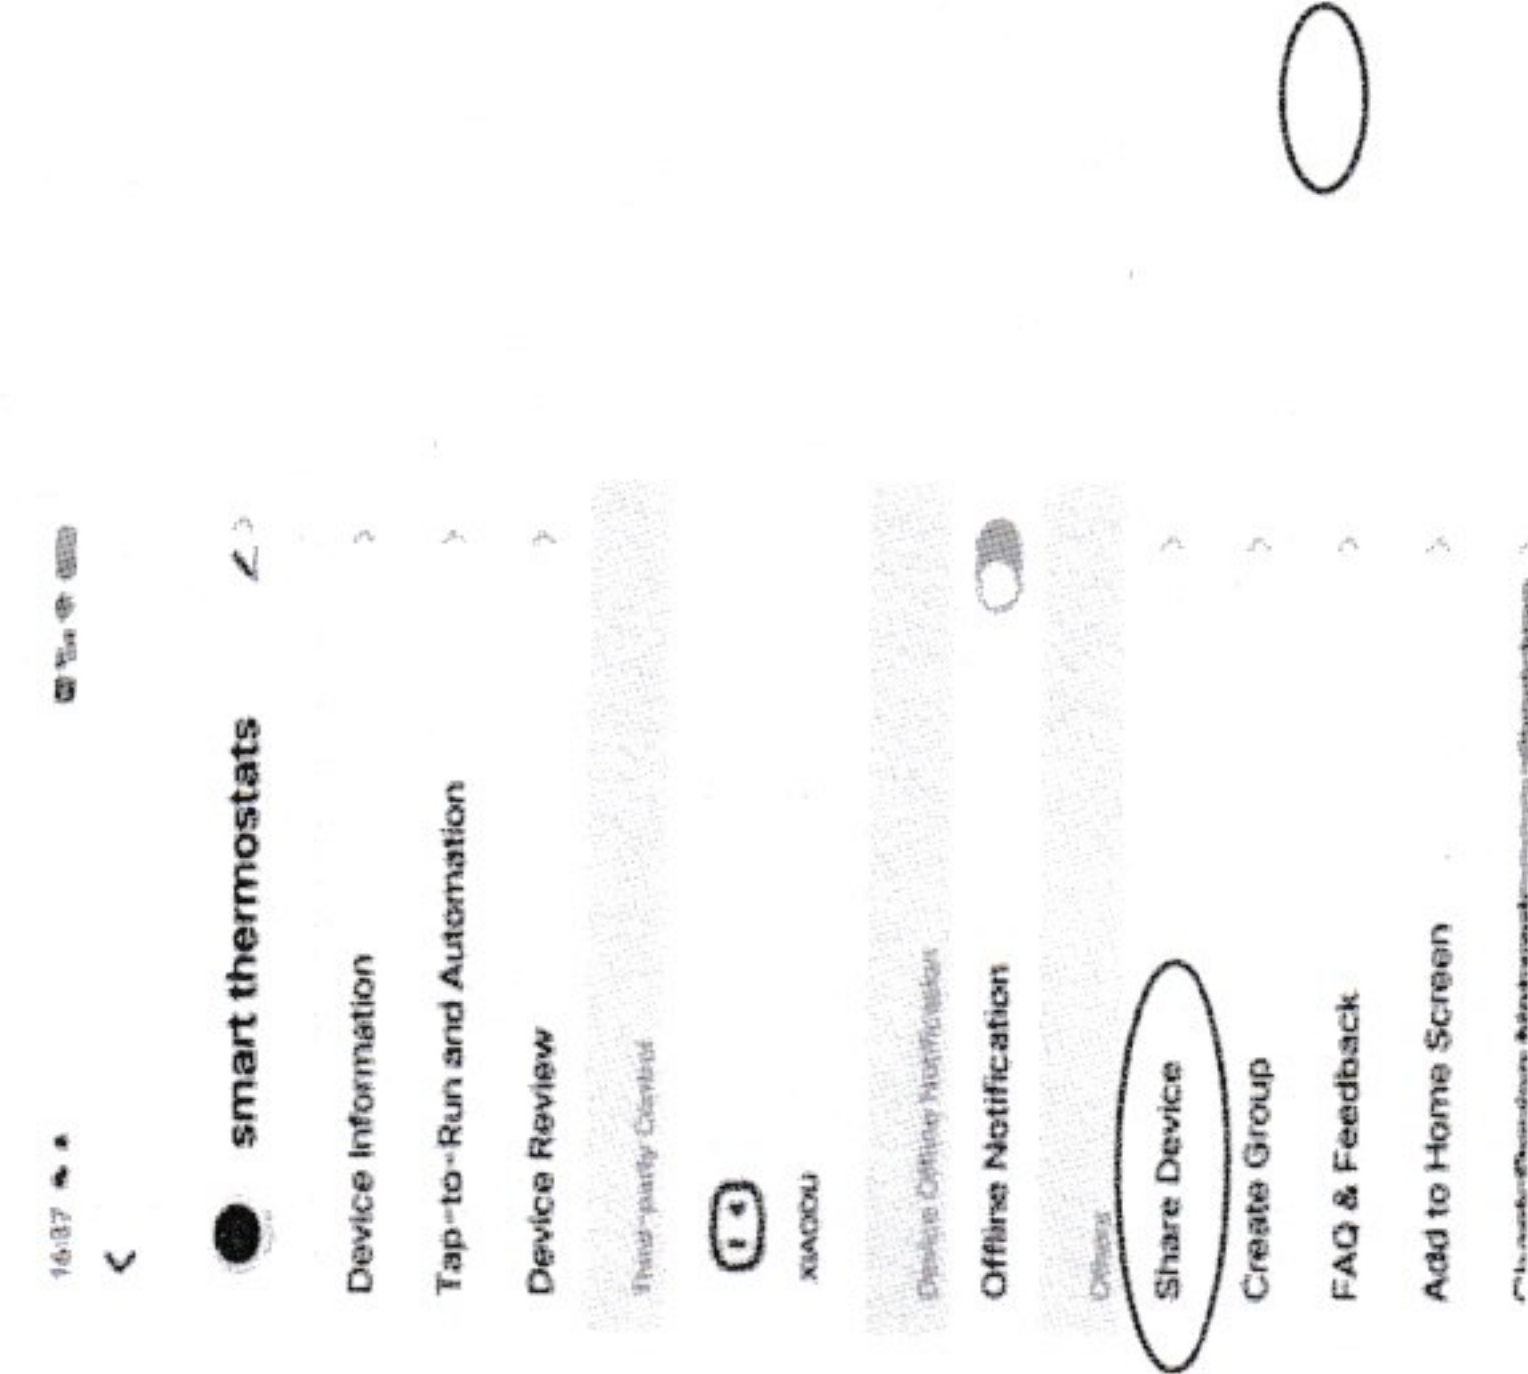

3. Click" Add Sharing" as shown below.

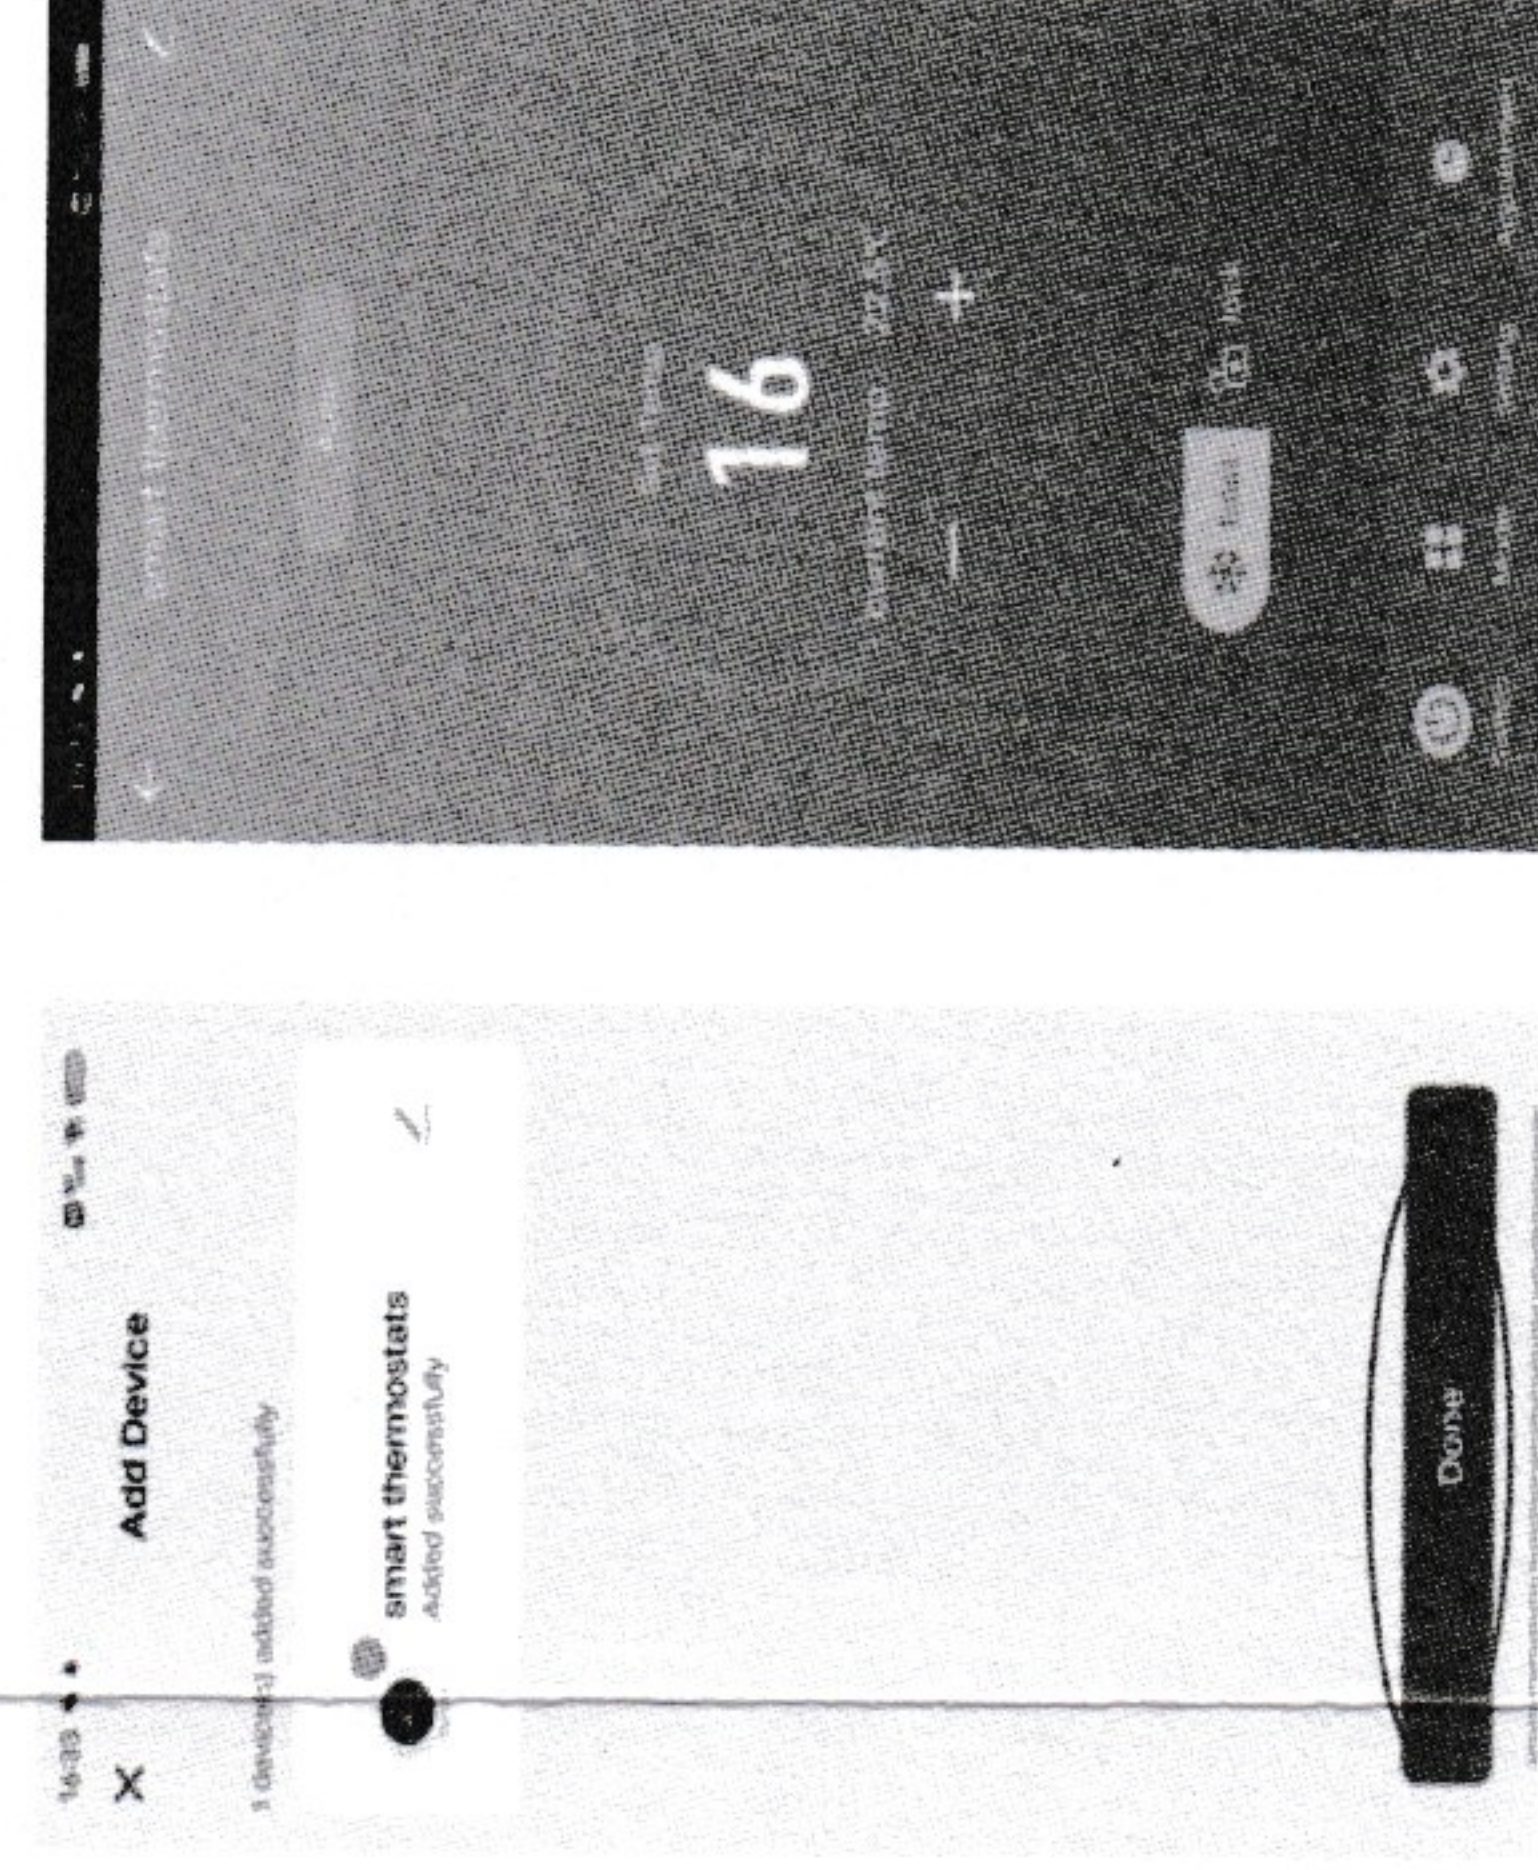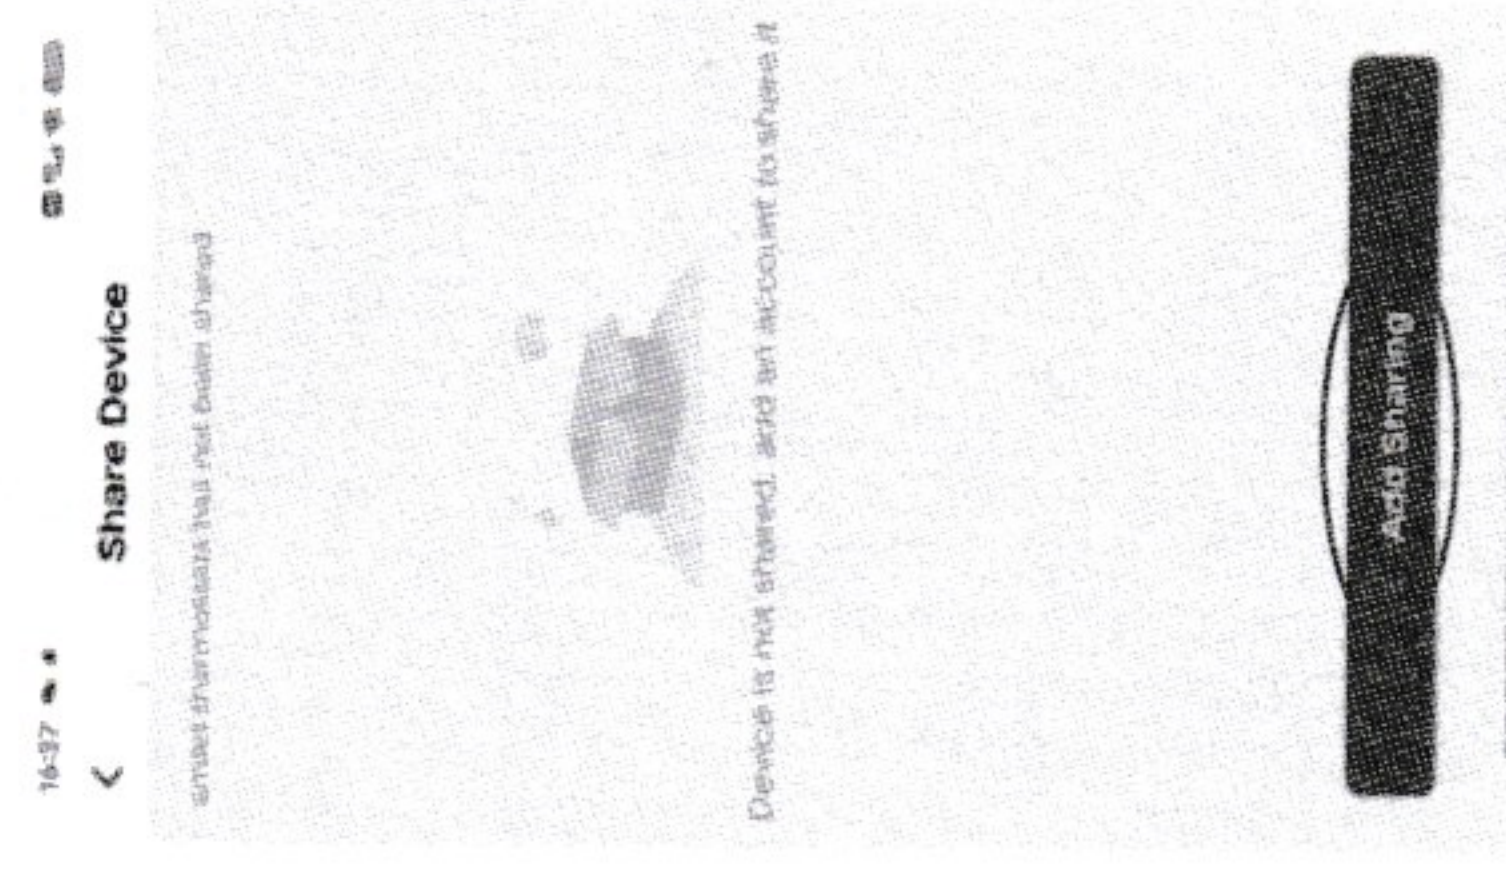

4. Click "Share with Smart Life Account" and enter the account.Click "Done" as shown in the image below.

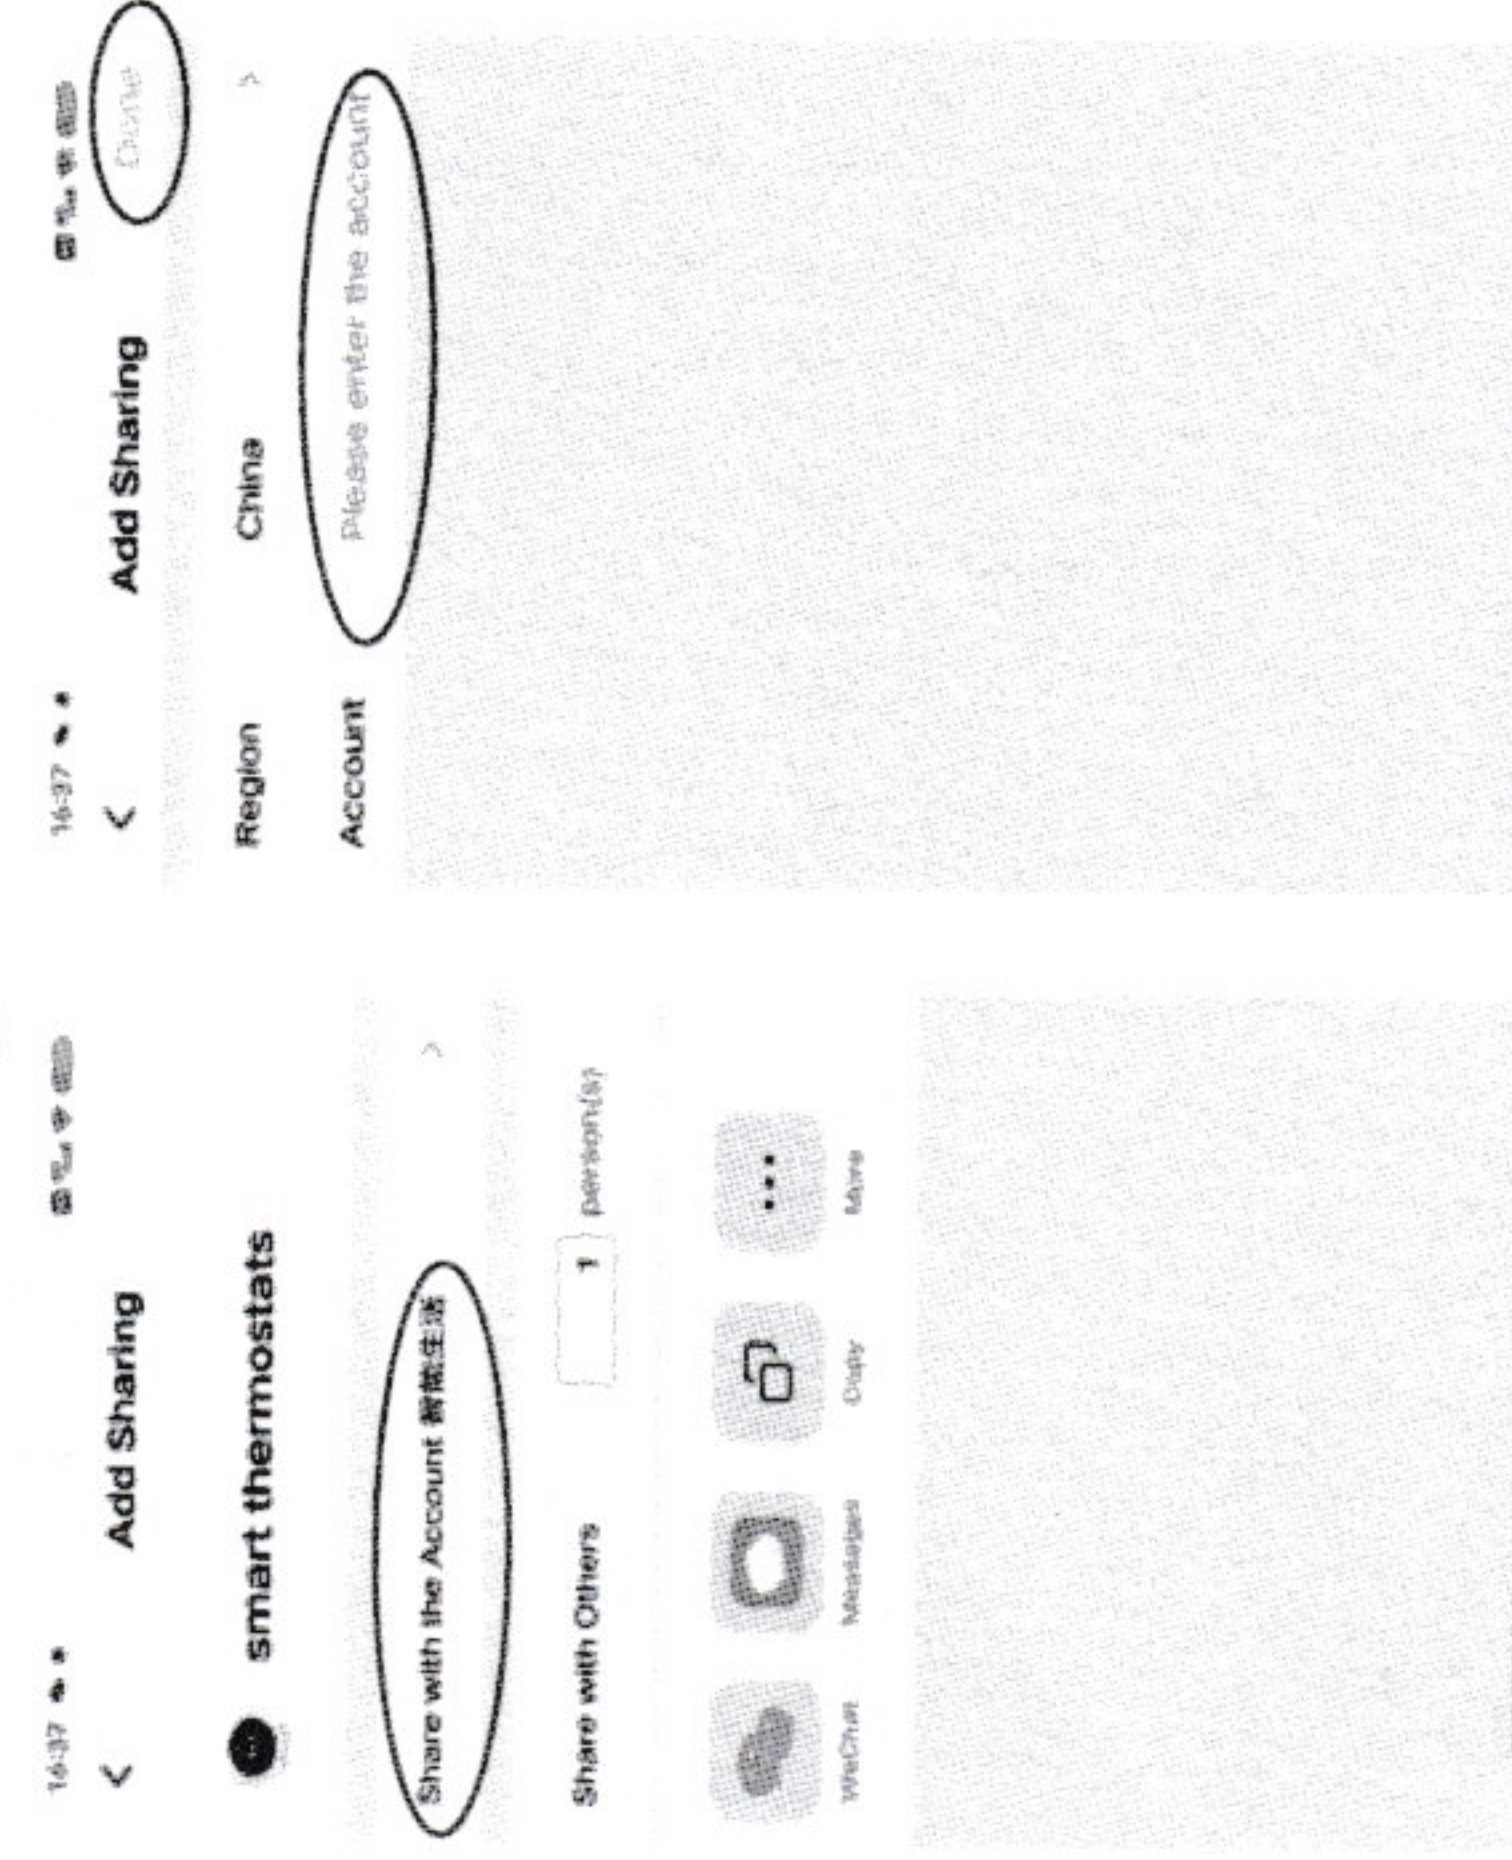

4)Thermostat and mobile phone Exit the network:

When the transmitter panel is powered on,press the " " for 3 seconds,the screen will display full display, and the control panel has entered the state of exiting the network (also the state of network distribution). The display shows that the networking symbol " " is flashing quickly.